

HYDRACoRe70pHT Series

High flux, 720 Dalton MWCO thin film, chlorine-resistant nanofiltration membranes designed specifically for color removal as well as acid, caustic, and other chemical reclamation applications through the membrane's ability to reject color, proteins, fats, oils, and other macromolecular species.


Specified Performance

Model	Feed Spacer, inches (cm)	Area, ft ² (m ²)	Dimensions, inches. (cm)			Max Feed Flow, gpm (m ³ /hr)	Max. Pressure Drop per Element, psi (bar)
			A	B	C		
HYDRACoRe70pHT ¹ 4040-46	0.046 (0.12)	70 (6.5)	40.0 (101.6)	3.98 (10.1)	0.75 (1.9) OD	30 (6.8)	15 (1.0)
HYDRACoRe70pHT ¹ 8040-46	0.046 (0.12)	275 (25.5)	40.0 (101.6)	7.90 (20.1)	1.125 (2.9) ID	80 (18.2)	13 (0.9)

General Product Description


Configuration: Sanitary Spiral Wound
 Membrane Polymer: Sulfonated Polyethersulfone

Packaging: All membrane elements are supplied with a brine seal, interconnector, and O-rings. Elements are enclosed in a sealed polyethylene bag containing less than 1.0% sodium meta-bisulfite solution, and then packaged in a cardboard box.

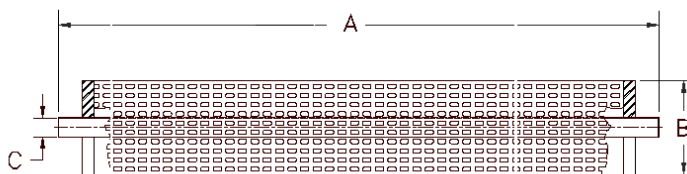

Core tube extension = 1.05" (26.7 mm)

4040 Style

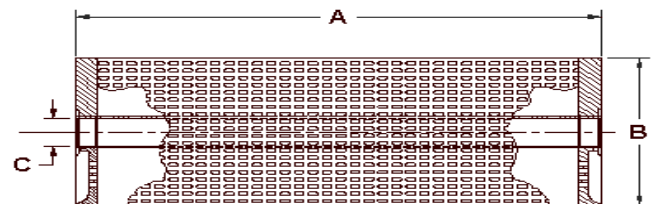

8040 Style with ATDs

Product Use and Restrictions[^]

Maximum Applied Pressure:	600 psig (41 bar)
Maximum Continuous Chlorine Concentration ² :	10 ppm
Maximum Chlorine Concentration for Cleaning ² :	100 ppm
Maximum Operating Temperature:	158 °F (70°C)
Operating pH Range:	1-13.5
Cleaning pH Range:	1-13.5
Maximum Pressure Drop for a vessel:	60 psi (4 bar)

¹ HYDRACoRe70pHT is not intended for use in drinking water or direct food contact applications.

² Transition metals (Fe, Mn) should not be present in the water or on the membrane as these can accelerate detrimental reactions between the membrane and the oxidant.

[^] The limitations shown here are for general use. For specific projects, operating at more conservative values may ensure the best performance and longest life of the membrane. See Hydranautics Technical Bulletins for more detail on operation limits, cleaning pH, and cleaning temperatures.

Disclaimer: The information and data are presented in good faith and in lieu of all warranties. All express or implied warranties, including the warranties of merchantability and fitness for a particular purpose, are hereby disclaimed and excluded. Conditions and methods of use of our products are beyond our control. Hydranautics assumes no liability for results obtained or damages incurred through the application of the presented information and data. It is the user's responsibility to determine the appropriateness of Hydranautics' products for the user's specific end uses.

4/24/2018

Hydranautics Corporate office

401 Jones Road, Oceanside, CA 92058, USA Toll Free: +1-800-CPA-PURE Tel: +1-760-901-2500 Fax: +1-760-901-2578
 Web: www.membranes.com Email: hy-info@nitto.com