

## DairyRO®

### High performance Reverse Osmosis Membranes for the Dairy Industry

Hydranautics – A Nitto Group Company has 40+ years of reverse osmosis membrane manufacturing experience which is incorporated into every DairyRO® membrane and element. Automation employed for all our DairyRO® elements ensures straight and minimally sized glue lines, maximum membrane area and the highest possible glue line adhesion.

DairyRO® composite polyamide reverse osmosis elements are of the net-wrapped, high flow full-fit design and hot water sanitizable type. All membranes and elements are manufactured using highly controlled, ISO 9001-compliant processes, ensuring the highest quality, most consistent and reliable performance available. Hydranautics has set a new industry-standard using robot-based automatic rolling machine, specifically designed by Hydranautics, for fabricating membrane modules of the highest quality. The result is a higher level of filtration and separation performance for our customers.

### Key Features:

- All elements are automatically rolled on a proprietary, robotized machine
- All components conform to FDA regulation CFR Title 21, “3A Sanitary Standards for Crossflow Membrane Modules, Number 45-02”, EC Reg. No. 1935/2004, and EU Reg. No. 10/2011
- 100% testing of membranes with 1500 ppm NaCl for flux and rejection compliance
- DairyRO-HF is a high-flow version using Hydranautics’ patented technology which provides 20% more water flow
- DairyRO-HS is a heat-sanitizable version using Hydranautics’ patented technology which allows heat sanitization at 85 °C

### Key Benefits:

- Superior glue-line adhesion and strength
- Tighter rolling and caging
- Greater structural reliability
- All elements provide the highest rejection using Hydranautics’ RO technology
- Greater flow rates due to maximum effective membrane area
- Hot water sanitizable membranes for efficient sanitization and cleaning operations

### Applications:

- Pre-concentration of milk or whey for reducing product transportation costs
- Lactose production
- Sweet/acid whey concentration
- Concentration of UF permeate
- Milk and juice concentration



## Type:

Configuration	Sanitary (full-fit) spiral wound
Membrane polymer	Composite polyamide

## Application Data:


Maximum applied pressure	800 psig (55.0 bar)
Maximum chlorine concentration	< 0.1 ppm
Maximum operating temperature	122 °F (50 °C)
Operating pH range	2 – 11
Cleaning pH range (ambient temperature)	1.5 – 11.5
Cleaning pH range (max. temp. 122 °F / 50 °C)	1.8 – 11.0
Maximum pressure drop for a vessel	60 psi (4 bar)

## Products and Guidelines:


Model	Feed spacer, inches (cm)	Area, ft <sup>2</sup> (m <sup>2</sup> )	Dimensions, inches (cm)			Max. feed flow, gpm (m <sup>3</sup> /hr)	Max. pressure drop per element, psi (bar)
			A	B	C		
<b>DairyRO®3838-30</b>	0.030 (0.076)	80 (7.4)	38.0 (96.5)	3.78 (9.6)	0.83 (2.11)	30 (6.8)	15 (1.0)
<b>DairyRO®3838-46</b>	0.046 (0.117)	63 (5.9)	38.0 (96.5)	3.78 (9.6)	0.83 (2.11)	30 (6.8)	15 (1.0)
<b>DairyRO®3840-30</b>	0.030 (0.076)	80 (7.4)	38.75 (98.4)	3.78 (9.6)	0.83 (2.11)	30 (6.8)	15 (1.0)
<b>DairyRO®3840-46</b>	0.046 (0.117)	63 (5.9)	38.75 (98.4)	3.78 (9.6)	0.83 (2.11)	30 (6.8)	15 (1.0)
<b>DairyRO®6338-30</b>	0.030 (0.076)	240 (22)	38.0 (96.5)	6.36 (16.2)	1.138 (2.89)	70 (15.9)	15 (1.0)
<b>DairyRO®8038-30</b>	0.030 (0.076)	385 (36)	38.0 (96.5)	7.90 (20.1)	1.125 (2.86)	80 (18.2)	13 (0.9)
<b>DairyRO®8038-46</b>	0.046 (0.117)	300 (28)	38.0 (96.5)	7.90 (20.1)	1.125 (2.86)	80 (18.2)	13 (0.9)
<b>DairyRO®8040-30</b>	0.030 (0.076)	385 (36)	40.0 (101.6)	7.90 (20.1)	1.125 (2.86)	80 (18.2)	13 (0.9)
<b>HYDRAPolish 8*</b>	0.030 (0.076)	350 (33)	40.0 (101.6)	7.90 (20.1)	1.125 (2.86)	80 (18.2)	13 (0.9)

\* HF-HS elements are available in any of the above sizes excluding HYDRAPolish.

HYDRAPolish 8 is provided with one interconnector assembly, two anti-telescoping devices, and one brine seal.

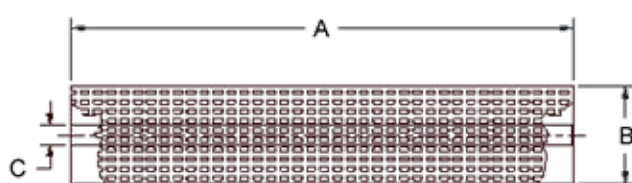

**3838, 3840, 8038 Style**

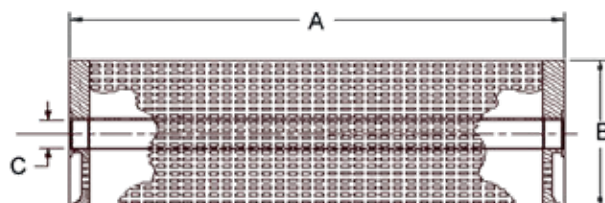

**8040 Style with ATDs**

Nomenclature = DairyRO® + Size + Feed Spacer

## Solutions You Need.

## Technologies You Trust!

### Hydranautics Corporate office

401 Jones Road, Oceanside, CA 92058, USA Toll Free: +1-800-CPA-PURE Tel: +1 760 901 2500 Fax: +1 760 901 2578

Web: [www.membranes.com](http://www.membranes.com) Email: [hy-info@nitto.com](mailto:hy-info@nitto.com)

#### Americas

401 Jones Road,  
Oceanside,  
CA 92058, USA  
Tel: +1 760 901 2500

#### Europe and Africa

Calle Constitucion 3,  
3° 5ª Sant Just  
Desvern,  
08960 Barcelona,  
Spain  
Tel: +34 934 731 722

#### Middle East

Office no. 31, Bldg no .  
S10122 (A2) South Zone,  
Jebel Ali Free Zone,  
P.O.Box 112839  
Dubai, UAE  
Tel: +971 4 889 5806

#### Indian Subcontinent

407, Palm Spring  
Center, Link Road,  
Malad (West),  
Mumbai 400064,  
India  
Tel: +91 22 4003 0500

#### China

15-16F, The Place Tower  
C, 150 Zunyi Road,  
Changning District,  
Shanghai 200051,  
P.R. China  
Tel: +86 21 5208 2255

#### SEA & Oceania

438 Alexandra Road  
#19-01/04,  
Alexandra Point,  
Singapore 119958  
Tel: +65 6879 3820

#### Japan

26F, Shinagawa  
Season Terrace,  
1-2-70, Konan,  
Minato-ku, 108-0075,  
Tokyo, Japan  
Tel: +81 3 6632 2044