

SWC5-LD

High Performance, Low Fouling Seawater RO membranes for Desalination and Power Industry

SWC5-LD from the LD Technology™ innovative low fouling membranes achieves superior salt and boron rejection to give a consistently pure end-product from a variety of feedwaters at low operating pressures

With the desalination industry poised to meet the world's fresh water demand, it has become critical to obtain fresh water in an environmentally friendly and economical manner.

At Hydranautics, we understand the needs of the desalination industry to maintain the highest purity of the produced water while optimizing flow and reducing the power consumption of the desalination system.

The SWC5-LD Seawater Reverse Osmosis membrane from Hydranautics combines the best of the seawater desalination technology with the cutting edge of the low fouling LD Technology™. The SWC5-LD gives you the highest flow rates, highest ion rejection and the lowest energy consumption with reduced colloidal fouling.

The SWC5-LD is the most suitable membrane for desalination applications for conventional as well as hybrid plants. When desalination is used for applications such as boiler feedwater for power plants and agricultural application, you can trust the SWC5-LD to give you the performance you need!

Applications:

- Boiler makeup water in power industry
- Conventional and hybrid desalination plants
- Boron reduction for agricultural application

Performance:

Permeate Flow	9,000 gpd (34.1 m ³ /d)
Salt Rejection	99.8 % (99.7 % minimum)
Boron Rejection (Typical):	92.0% [†]

[†] When tested at standard test conditions with 5.0 ppm Boron in feed solution

Applications Data:

pH Range, Continuous (Cleaning)	2-11 (1-13)*
Maximum Feedwater SDI (15 min)	5.0
Maximum Feed Flow	75 GPM (17.0 m ³ /h)

* The limitations shown here are for general use. For specific projects, operating at more conservative values may ensure the best performance and longest life of the membrane. See Hydranautics Technical Bulletins for more detail on operation limits, cleaning pH, and cleaning temperatures.

Test Conditions:

The stated performance is initial (data taken after 30 minutes of operation), based on the following conditions

32,000 ppm NaCl
800 psi (5.5 MPa) Applied Pressure
77 F (25 C) Operating Temperature
10% Permeate Recovery
6.5 - 7.0 pH Range

Key benefits:


- High permeate flow - 9,000 gpd (34.1 m³/d)
- High salt rejection - 99.8% (99.7% minimum)
- 92% boron rejection
- Lowest colloidal fouling
- Greater tolerance to high pH cleanings
- Lower energy consumption



Features:

- **Enhanced membrane chemistry** for increased chemical resistance
- **Innovative spacer design** to minimize trapping of small colloidal particles
- **Proprietary vented seal carrier** to eliminate pressure-shock damage during system startup.

SWC5-LD, Sea Water Composite Polyamide RO Membranes, for Your Desalination Needs!

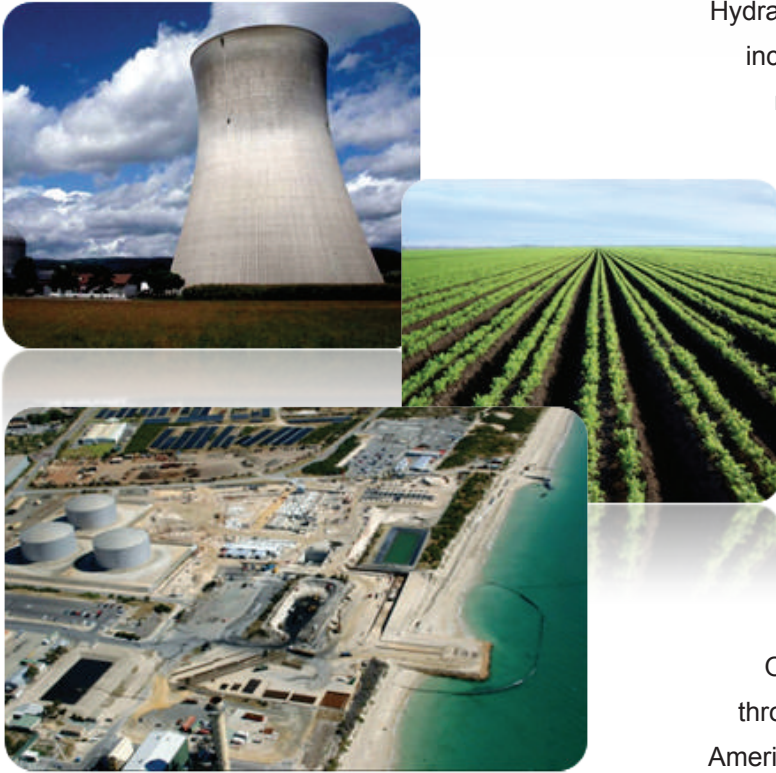

Hydranautics - A Nitto Group Company is a global leader in research, including reverse osmosis, nanofiltration, ultrafiltration, and microfiltration. Our membrane products (CPA, ESPA, LFC, SWC, ESNA, HYDRAcap and HYDRAsub) are used extensively in municipal & industrial water and wastewater treatment.

Hydranautics has over 40 years experience in the membrane technology arena and are committed to creating innovative membrane technologies which provide clean water to a thirsty world.

Our global membrane division is headquartered in Oceanside, CA, USA. With three state-of-the-art manufacturing sites located in Oceanside - CA - USA, Shiga - Japan and Shanghai - China, Hydranautics has a combined manufacturing area in excess of 131,000 m² (1,400,000 ft²).

Our world-wide sales and customer service offices are located throughout Europe, Asia, the Middle East, North America and South America.

Solutions You Need.

Technologies You Trust!

Hydranautics Corporate Office:

401 Jones Road, Oceanside, CA 92058, USA . Toll Free: 1-800-CPA-PURE Phone: +760-901-2500 Fax: +760-901-2578

Email: info@hydranautics.com Website: www.membranes.com

Americas
Hydranautics

401 Jones Road
Oceanside, CA
92058, USA
Tel: +760-901-2500
Tel:1-800-CPAPURE
Fax: +760-901-2578

Europe/Africa
Hydranautics

Calle Constitucion 3,
3^o 5^a Sant Just Desvern,
08960 Barcelona
Spain
Tel: +34 934 731 722
Fax: +34 934 731 485

Middle East
Hydranautics

Office no 31
Bldg no . S10122 (A2)
South Zone,
Jebel Ali Free Zone
P.O.Box: 112839 Dubai
United Arab Emirates
Tel: +971 4 889 5806

Indian Subcontinent
Hydranautics

407, Palm Springs
Center, Link Road,
Malad (West),
Mumbai 400 064,
India
Tel:+91-22-40030500
Fax:+91-22-40030496

S.E. Asia/Australia
Nitto

438 Alexandra Road
#19-01/04,
Alexandra Point
Singapore 119958
Tel: +65-6879-3820
Fax: +65-6223-7690

Japan
Hydranautics / Nitto

26F, Shinagawa Season Terrace,
1-2-70, Konan,
Minato-ku, 108-0075,
Tokyo
Tel: +81-3-6632-2044
Fax: +81-3-6632-2019