

HYDRACoRe50-PS

Hydranautics' HYDRACoRe50 product is a chemical and oxidant-resistant composite nanofiltration element which is designed to reject organic species with a nominal molecular weight of 1000 or greater. Applications include: color separations and adjustments in juices, sauces, and food extracts; dye concentration; protein and enzyme concentration.

All products are USDA-accepted. Components conform to FDA regulation CFR Title 21, "3A Sanitary Standards for Crossflow Membrane Modules, Number 45-02", EC Reg. No. 1935/2004, and EU Reg. No. 10/2011.


Products & Guidelines:

Model	Feed Spacer, inches (cm)	Area, ft ² (m ²)	Dimensions, inches. (cm)			Max. Feed Flow, GPM (m ³ /hr)	Max. Pressure Drop per Element, psi (bar)
			A	B	C		
3838-30	0.030 (0.076)	80 (7.4)	38.0 (96.5)	3.78 (9.60)	0.83 (2.11)	30 (6.8)	15 (1.0)
3838-46	0.046 (0.117)	63 (5.9)	38.0 (96.5)	3.78 (9.60)	0.83 (2.11)	30 (6.8)	15 (1.0)
3838-65	0.065 (0.165)	50 (4.5)	38.0 (96.5)	3.78 (9.60)	0.83 (2.11)	30 (6.8)	15 (1.0)
3840-30	0.030 (0.076)	80 (7.4)	38.75 (98.4)	3.78 (9.60)	0.83 (2.11)	30 (6.8)	15 (1.0)
3840-46	0.046 (0.117)	63 (5.9)	38.75 (98.4)	3.78 (9.60)	0.83 (2.11)	30 (6.8)	15 (1.0)
8038-30	0.030 (0.076)	385 (36)	38.0 (96.5)	7.90 (20.1)	1.125 (2.86)	80 (18.2)	13 (0.9)
8038-46	0.046 (0.117)	300 (28)	38.0 (96.5)	7.90 (20.1)	1.125 (2.86)	80 (18.2)	13 (0.9)
8038-65	0.065 (0.165)	230 (21)	38.0 (96.5)	7.90 (20.1)	1.125 (2.86)	80 (18.2)	13 (0.9)
8040-30	0.030 (0.076)	385 (36)	40.0 (101.6)	7.90 (20.1)	1.125 (2.86)	80 (18.2)	13 (0.9)
8040-46	0.046 (0.117)	300 (28)	40.0 (101.6)	7.90 (20.1)	1.125 (2.86)	80 (18.2)	13 (0.9)
8040-65	0.065 (0.165)	230 (21)	40.0 (101.6)	7.90 (20.1)	1.125 (2.86)	80 (18.2)	13 (0.9)


Type	Configuration:	Sanitary (Full-Fit)
	Outerwrap:	Polypropylene net wrap
	Membrane Polymer:	Sulfonated Polyethersulfone
	Molecular Weight Cut-off:	1000 daltons

Application Data	Maximum Applied Pressure:	600 psig (41 bar)
	Maximum Continuous Chlorine Concentration ¹ :	10 ppm
	Maximum Chlorine Concentration for Cleaning ¹ :	100 ppm
	Maximum Operating Temperature:	122 °F (50 °C)
	Operating pH Range:	2.0 – 11.0
	Cleaning pH Range (ambient temperature):	1.0 – 12.0
	Cleaning pH Range (max. temp 122°F/50 °C):	1.5 – 11.0
	Maximum Pressure Drop for a vessel:	60 psi (4 bar)

¹ Transition metals (Fe, Mn) should not be present in the water or on the membrane as these can accelerate detrimental reactions between the membrane and the oxidant.

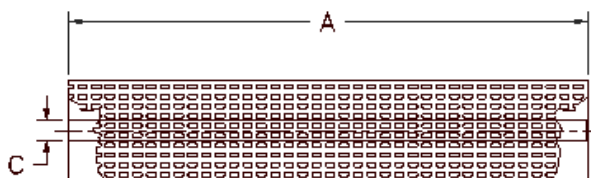

3838, 8038 Style

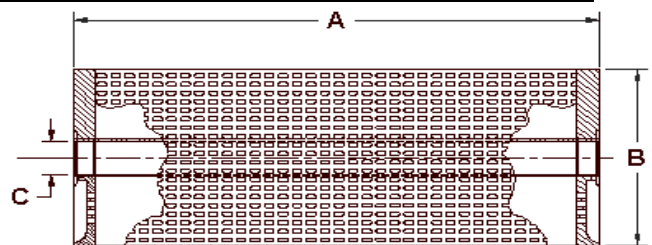

8040 Style with ATDs

Notice: Elements are vacuum-sealed in a polyethylene bag containing less than 1.0% sodium meta-bisulfite solution, and then packaged in a reinforced cardboard box. 8040 styles include interconnector assembly, ATDs and brine seals. Hydranautics believes the information and data contained herein to be accurate and useful. The information and data are offered in good faith, but without guarantee, as conditions and methods of use of our products are beyond our control. Hydranautics assumes no liability for results obtained or damages incurred through the application of the presented information and data. It is the user's responsibility to determine the appropriateness of Hydranautics' products for the user's specific end uses.

6/28/17